


## LSG-SL-120 CCT 120leds/m led strip

1. Patented design
2. Using LED with high efficiency and performance feature, to get an energy saving product.
3. Multi-stand pure copper material, with small impedance, low thermal and good chemical stability.
4. Indoor or outdoor application for option.
5. Customized length available for indoor or outdoor usage.
6. LED rated lifespan is 50,000h.
7. Complying with CE standard.



### Structure & Parameter

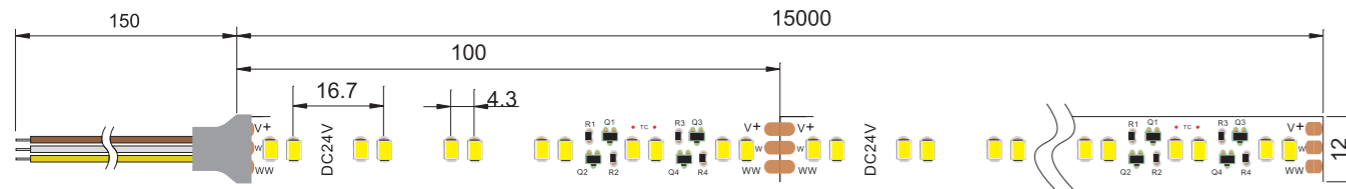

#### Color temperature / Lumen

|                               |                          |                    |
|-------------------------------|--------------------------|--------------------|
| Warm White 3000k<br>597LM / m | White 6000k<br>618LM / m | ww+w<br>1201LM / m |
|-------------------------------|--------------------------|--------------------|

#### Basic Parameter

|                     |              |
|---------------------|--------------|
| Input voltage       | DC24V        |
| Power/m             | 12W          |
| Max current / LED   | 25mA         |
| Beam angle          | 120 °        |
| CRI(Ra)             | >80          |
| LEDs /m             | 120LEDs      |
| SMD Type            | 2835         |
| Working hour        | 50000h       |
| Working temperature | -25 C ~+45 C |
| Cutttable length    | 100mm        |
| PCB Width           | 12mm         |

